


Strain gauge K-216.70-2006

Item number: 12026




Strain gauges for the construction of sensors. The carrier material of this strain gauge is PEEKF with 20µm thickness. The constantan measuring grid (3 ... 5µm) is covered with PEEKF foil, also with 20µm thickness. Therefore this strain gauge is similarly flexible as comparable strain gauges made of polyimide foil. In terms of handling, this DMS type is therefore somewhat more robust. Unlike polyimide, PEEKF is not hygroscopic, so that additional sealing of the upper polyimide cover film with epoxy resin is not necessary.

Due to the combination of PEEKF and Konstantan measuring grid, this Strain gauge type is particularly stable in the zero signal and is characterized by very low temperature-induced drift of the zero signal. The temperature-related drift due to expansion of the sensor body is compensated in a wide range from -10 ° C to + 120 ° C for the materials steel (variant 1) and aluminum (variant 3). The permitted operating range is from -40 ° C to + 200 ° C. There are 10⁷ load cycles with ± 1000µm/m achieved with a shift of the zero signal less than 300µm/m.

The gage-factor of the Transduce strain gauges is approx. 2 and is not individualized unlike as for stress analysis gauges. The tolerance of the gage factor for measuring grids up to 1.5mm grid length is ± 1.5%.

Technical Drawing

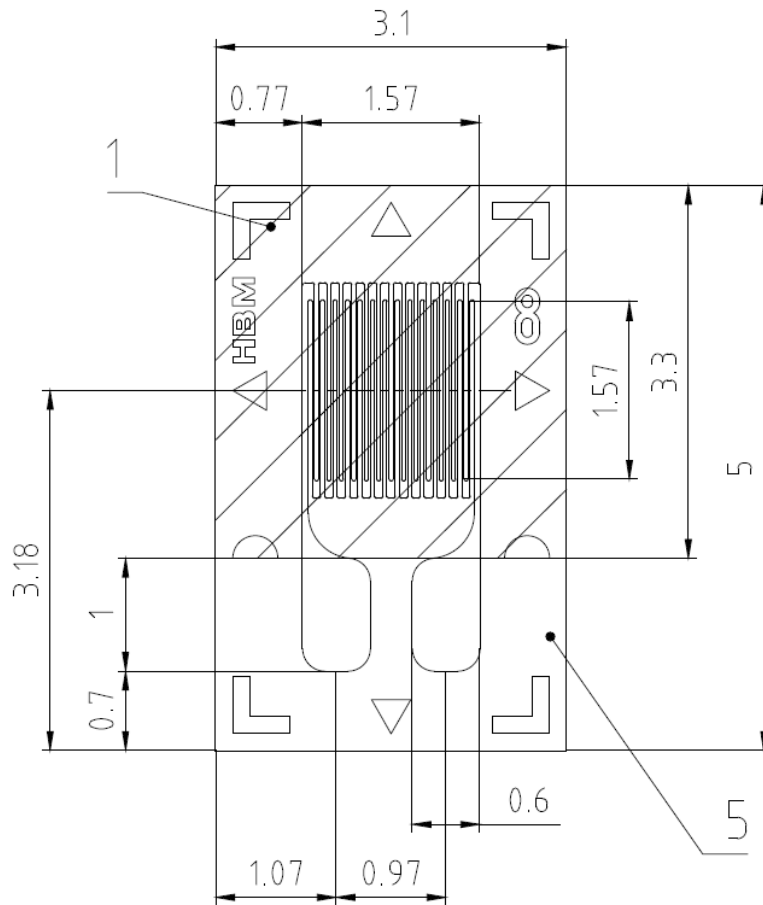

Technical Data

Strain gauge		Einheit
Type	Metallfolie	
Number of grids	1	
Grid width	3	mm
maximum width	4.5	mm
Grid length	1.6	mm
maximum length	5.7	mm
Resistance	350	Ohm
Connection	Lötpad	
Substrate	PEEK	