

# VIP-3/PT/HD44SUB/F - Interface module



2904274

<https://www.phoenixcontact.com/de/produkte/2904274>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE module, with push-in connections and high density D-SUB miniature socket-strip, for mounting on NS 35 rails, no. of pos.: 44

## Commercial data

Item number	2904274
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	I1 - Systemverkabelung
Product key	CK2122
Catalog page	Page 558 (C-5-2019)
GTIN	4046356814836
Weight per piece (including packing)	215,5 g
Weight per piece (excluding packing)	203,8 g
Customs tariff number	85366990
Country of origin	US

# VIP-3/PT/HD44SUB/F - Interface module



2904274

<https://www.phoenixcontact.com/de/produkte/2904274>

## Technical data

### Product properties

Product type	Interface module
Product family	VARIOFACE Professional
Number of positions	44

### Insulation characteristics

Overvoltage category	II
Pollution degree	2

### Electrical properties

Nominal voltage $U_N$	25 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Rated surge voltage	1.2 kV

### Connection data

#### Connection 1 (control level)

Connection method	High-density D-SUB socket strip
Screw thread	UNC 4-40
Number of connections	1
Number of positions	44

#### Connection 2 (field level)

Connection in acc. with standard	IEC / EN
Connection method	Push-in connection
Stripping length	8 mm
Number of positions	45
Conductor cross section rigid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

### Signaling

Status display	No
Status display present	No

### Dimensions

#### Item dimensions

Width	82.5 mm
Height	75.8 mm
Depth	63 mm

### Material specifications

# VIP-3/PT/HD44SUB/F - Interface module



2904274

<https://www.phoenixcontact.com/de/produkte/2904274>

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0
Housing insulation material	Polyamide 6.6 green

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

## Standards and regulations

Standards/regulations	EN 50178
-----------------------	----------

## Mounting

Mounting type	DIN rail mounting
Mounting position	any

## Notes

Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.
--------------------	--

# VIP-3/PT/HD44SUB/F - Interface module




2904274


<https://www.phoenixcontact.com/de/produkte/2904274>

## Drawings

Circuit diagram

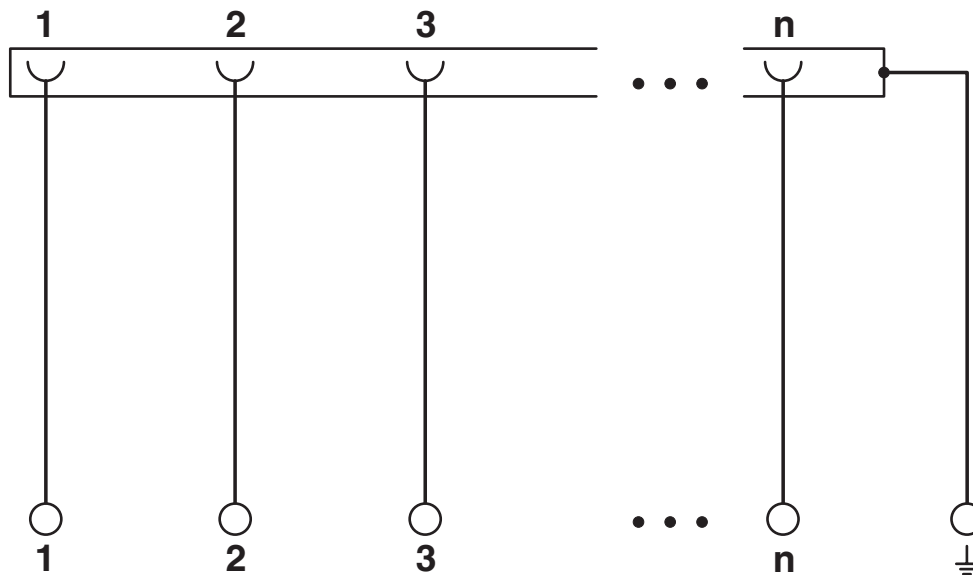

Dimensional drawing

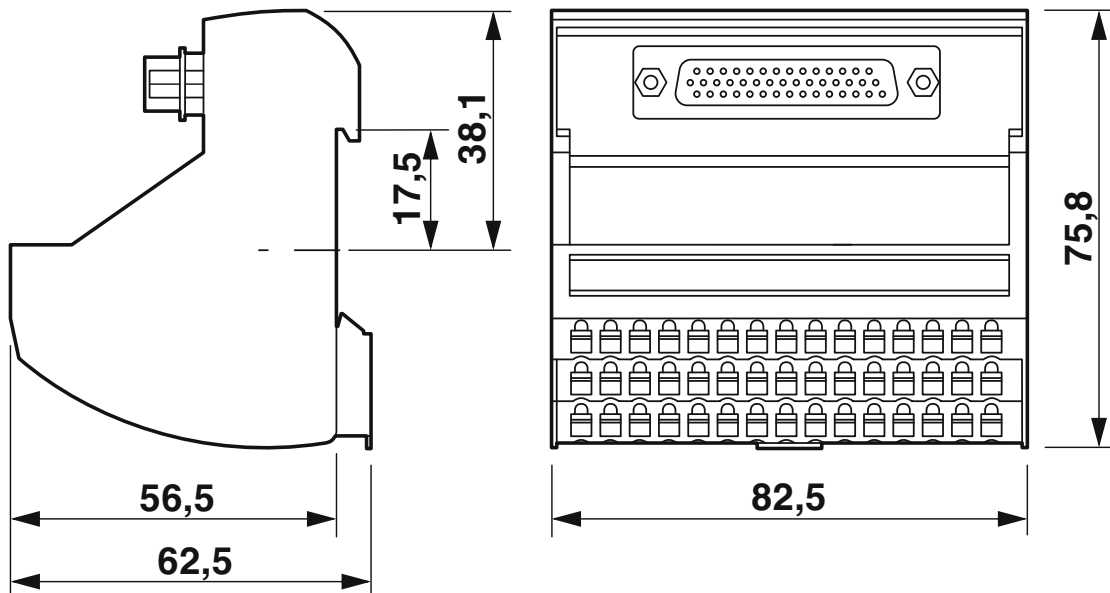

# VIP-3/PT/HD44SUB/F - Interface module





2904274


<https://www.phoenixcontact.com/de/produkte/2904274>


## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/de/produkte/2904274>

 <b>CSA</b> Approval ID: 2122203				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	105 V	1 A	26 - 14	-

 <b>cUL Recognized</b> Approval ID: FILE E 238705				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	125 V	1 A	26 - 14	-

 <b>UL Recognized</b> Approval ID: FILE E 238705				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	125 V	1 A	26 - 14	-

 <b>CSAus</b> Approval ID: 2122203				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	105 V	1 A	28 - 14	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

<b>cCSAus</b>				
---------------	--	--	--	--

# VIP-3/PT/HD44SUB/F - Interface module



2904274

<https://www.phoenixcontact.com/de/produkte/2904274>

## Classifications

### ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

### ETIM

ETIM 9.0	EC002780
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

2904274

<https://www.phoenixcontact.com/de/produkte/2904274>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	8586bd1d-686c-413c-9791-fadb11b6ff8b

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Deutschland GmbH

Flachsmarktstraße 8

D-32825 Blomberg

+49 52 35/3-1 20 00

[info@phoenixcontact.de](mailto:info@phoenixcontact.de)